



# Hip & Ridge Plus

RIDGE CAP SHINGLES



*A quick, easy and attractive way to protect the vulnerable hip and ridge areas of the roof.*

# Hip & Ridge Plus

## RIDGE CAP SHINGLES

Now you don't have to waste time cutting up shingles to protect those vulnerable hip and ridge areas. IKO has a better-looking, much easier alternative! Introducing IKO Hip & Ridge Plus cap shingles.

- Lightweight, perforated, and with a pre-cut tapered headlap to give you 3 perfectly sized pieces with no cutting required, you'll save on labour costs. Now you can improve the roofline and your bottom line!
- Larger 'metric' size for enhanced roofline appearance.
- Easy to separate, even at the site of application!
- IKO-SBS modified adhesive sealant for maximum wind protection.
- Featuring an algae-resistant granule.
- May be applied in a traditional "single" dimensional thickness and appearance. To add dimensional depth, simply apply in two layers, the top layer set back about 3/4" (19 mm).
- Available in colours that match our most popular Cambridge Collection, Royal Estate, Armourshake and Crowne Slate shingles!

Prior to application in cold weather, storing the shingles in a heated area will allow for easier bending.

### Installation Instructions

- Separate Hip & Ridge Plus shingles into thirds, using the perforation marks as a guide (see Diagram 1).
- These shingles are designed for a 5-5/8" (143 mm) exposure. (For a neater appearance, the top of each side of each piece has been factory trimmed on a 1" (25 mm) taper).
- Bend each piece over the hip or ridge, and nail 6-7/8" (156 mm) above the butt edge, 1" (25 mm) in from each edge, exposing each piece 5-5/8" (143 mm).
- Apply hip pieces starting at the lower end of the hip, working up toward the ridge.
- Apply ridge pieces starting at the end opposite to the prevailing wind direction and continue to the other end.

Note: To obtain a three-dimensional effect, (which is recommended, but not required), apply hip and ridge shingles double thickness by stacking 2 pieces on top of one another, the lower piece extending about 3/4" (19 mm) further than the top piece (see Diagram 2).

- The final shingle should be set in cement, and the exposed nail heads of the final shingle should be covered with cement.

Diagram #1


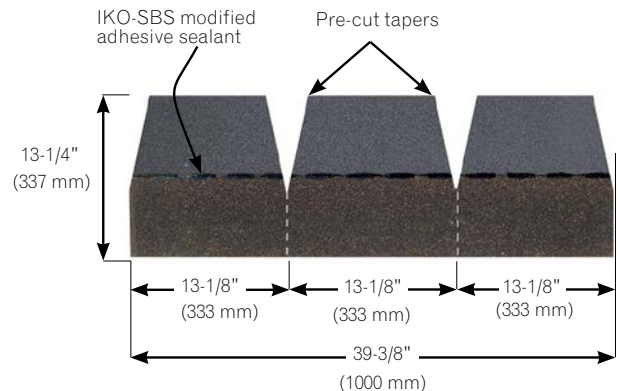


Diagram #2

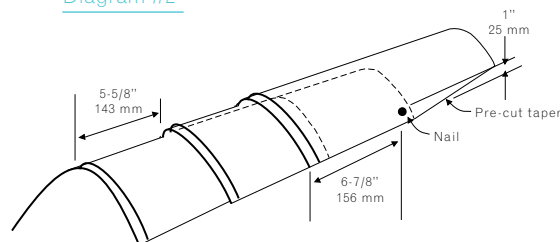

### SPECIFICATIONS

Length	39-3/8" (1000 mm)
Width	13-1/4" (337 mm)
Quantity per bundle	21 x 3 = 63
Coverage per bundle	29.5 lin. ft. (9 lin. m)


Note: All values shown are approximate.

Available in colours that match our most popular Cambridge Collection, Royal Estate, Armourshake, and Crowne Slate Architectural shingles!


Colour Availability: Cambridge / Cambridge IR<sup>+</sup>




Dual Black +



Charcoal Gray +



Harvard Slate



Dual Gray\*



Dual Brown



Weatherwood+



Driftwood+



Aged Redwood



Earthtone Cedar



Riviera Red



Vintage Green



National Blue<sup>1</sup>

<sup>1</sup> Blue granules may fade after extensive exposure to the sun's ultraviolet rays.

Colour Availability: Cambridge HD



Pacific Rim



Glacier



Sedona



Appalachian



Biscayne

Colour Availability: Royal Estate



Shadow Slate



Harvest Slate




Mountain Slate



Taupe Slate

Colour Availability: Armourshake



Shadow Black\*/Dual Black



Graystone\*/Charcoal Gray



Weathered Stone\*/Weatherwood



Chalet Wood\*/Driftwood




Western Redwood\*/Aged Redwood

Colour Availability: Crowne Slate



Royal Granite



Regal Stone

\*Please note that these Hip & Ridge Plus Shingle colours are complementary blend matches and are not precise.

Shingle Swatches shown are as accurate as modern printing processes allow. Shingle chips shown do not fully represent the entire colour blend range of the shingles. To ensure complete satisfaction please make your final colour selection from several full size shingles and view a sample of the product installed on a home.





Find out more about our products now by talking to an IKO Sales Representative, your professional roofing contractor or contact us directly at: United States **1-888-IKO-ROOF** (1-888-456-7663), Canada **1-855-IKO-ROOF** (1-855-456-7663) or visit our web site at: [www.iko.com](http://www.iko.com)

Note: The information in this literature is subject to change without notice. IKO assumes no responsibility for errors that may appear in this literature.

© Copyright 02/14 - MR3L058

